



A.H. Systems, Inc.

9710 Cozycroft Ave.
Chatsworth, CA 91311



Tel: (818) 998-0223



sales@AHSystems.com

Fax: (818) 998-6892



www.AHSystems.com

SAS-512-2

Log Periodic Antenna

190 MHz – 2 GHz

Constructed of lightweight aluminum, this Log Periodic Antenna has been manufactured to ensure maximum gain, low VSWR and high power handling capabilities.



Frequency Range: 190 MHz - 2000 MHz

Maximum Continuous Power: 1000 Watts

Max Radiated Field: 200 V/m

Pattern Type: directional

Impedance: 50 Ω

Connector: N-Type, female

Mounting Base: 1/4 - 20 Thread, female

Features

- Frequency Range of 190 MHz to 2000 MHz
- Receive and Transmit
- Individually Calibrated (1, 3 and 10 Meter calibration included, horizontal polarization)
- Rugged Construction
- Three Year Warranty

The A.H. Systems' SAS-512-2 antenna is lightweight, compact and has been manufactured to ensure maximum gain, low VSWR and high power handling capabilities. Whether testing inside a shielded enclosure or outdoors, this antenna will display efficient performance characteristics through its frequency range.

Recommended Accessories

- ATU-510 (Antenna Tripod, Wooden)
- AEH-510 (Azimuth and Elevation Head)
- PAM-0202 (30 dB Preamp) (Pre-amplifier)
- LPM-510 (Log Periodic Tripod Mount)



A.H. Systems, Inc.

9710 Cozycroft Ave.
Chatsworth, CA 91311



Tel: (818) 998-0223
Fax: (818) 998-6892


◆ sales@AHSystems.com
◆ www.AHSystems.com

A.H. Systems Inc.

9710 Cozycroft Ave. Chatsworth, CA 91311
Phone (818) 998-0223 Fax (818) 998-6892
E-mail: Info@AHSystems.com
Web site: <http://www.AHSystems.com>

Antenna Factor Model SAS-512-2

Conversion of meter reading
to field strength:
 $\text{dBuV/m} = \text{dBuV} + \text{AF} + \text{cable loss}$

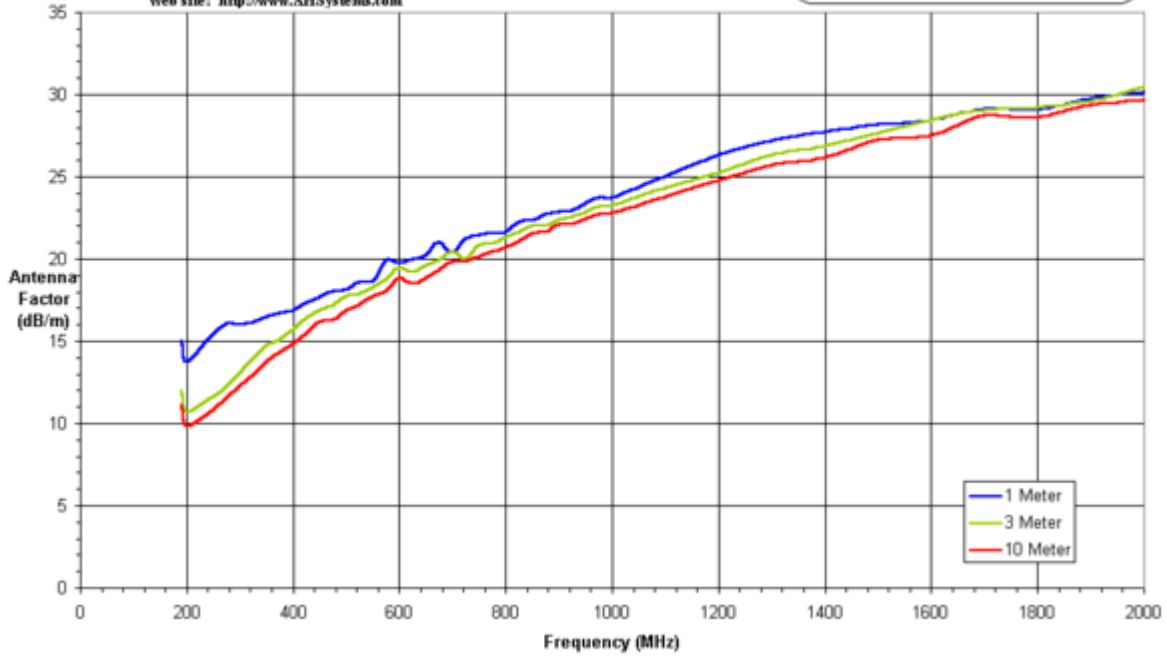

A.H. Systems Inc.

9710 Cozycroft Ave. Chatsworth, CA 91311
Phone (818) 998-0223 Fax (818) 998-6892
E-mail: Info@AHSystems.com
Web site: <http://www.AHSystems.com>

VSWR Log Periodic Antenna Model SAS-512-2

Average VSWR 1.62

